

## Hose Type 3/6, 4/6, 6/6H, 8/6



### Applications

**Waterblast:** Heat exchanger tube cleaning

**Hydraulics:** Pressure test equipment (valves, tooling and control panels), hydraulic tools (instrumentation packages for gauges, control of service equipment, hydraulic jacks, hydraulic tools)

### Technical Information


**Inner Core:** Polyoxymethylene (POM)

**Pressure Support:** 6 layers of high-tensile steel wire

**Outer Cover:** Polyamide (PA)

**Colour:** 3/6, 4/6 Blue 6/6 H Red, 8/6 Blue

**Temperature:** -30°C to +60°C -22°F to 140°F

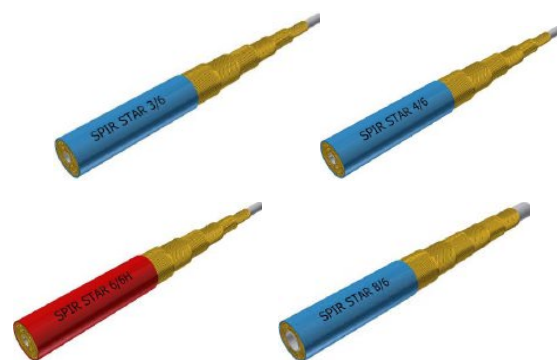

Type	ID	OD	Working Pressure	Burst Pressure	Bend Radius	Weight	Insert ID
3/6	3,0 mm	9,1 mm	2.800 bar	7.000 bar	150 mm	0,222 kg/m	1,8 mm
3/6	0,12 inch	0,36 inch	40.600 psi	101.500 psi	5,91 inch	0,149 lbs/ft	0,07 inch
4/6	4.0 mm	11,5 mm	2.800 bar	7.000 bar	175 mm	0,365 kg/m	1,8 mm
4/6	0,16 inch	0,45 inch	40.600 psi	101.500 psi	6.89 inch	0.245 lbs/ft	0,07 inch
6/6H	5.9 mm	16.4 mm	2.800 bar	7.000 bar	250 mm	0,750 kg/m	3,0 mm
6/6H	0,23 inch	0,65 inch	40.600 psi	101.500 psi	9.84 inch	0.504 lbs/ft	.12 inch
8/6	8.0 mm	16.4 mm	2,100 bar	5.250 bar	250 mm	0,640 kg/m	4.5 mm
8/6	0,31 inch	0,65 inch	30,450 psi	76,125 psi	9.84 inch	0.430 lbs/ft	0,18 inch